
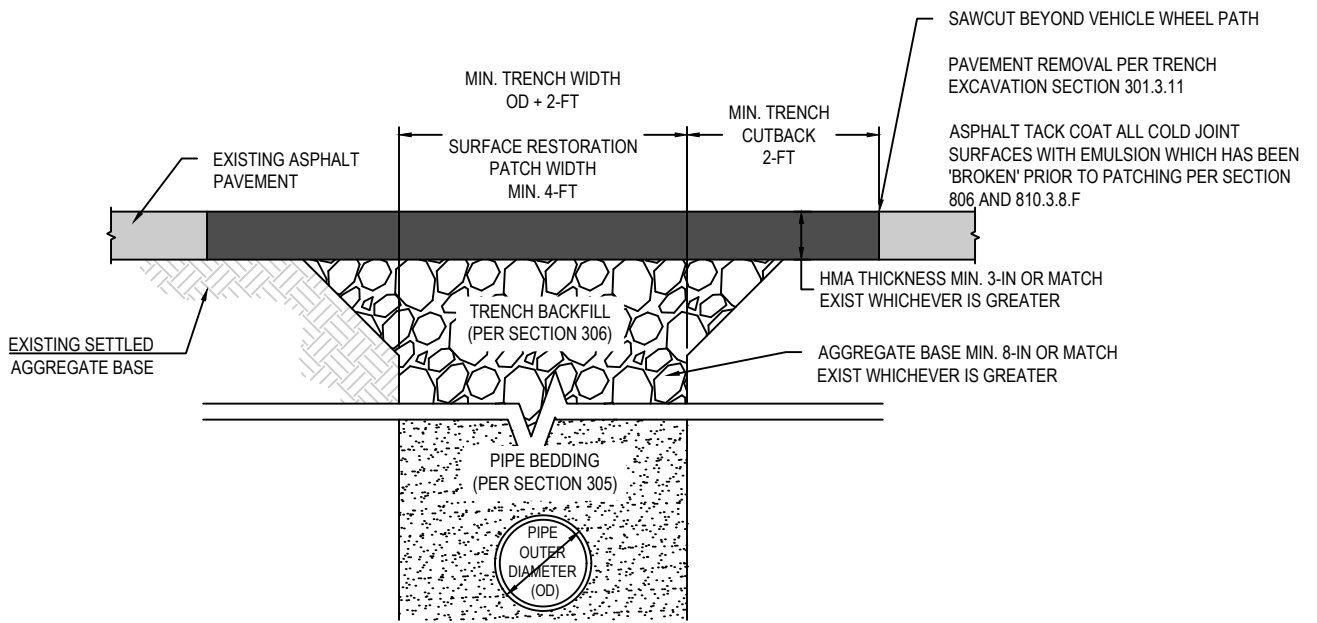


**TYPE "B" CONCRETE REPAIR DETAIL**

**A**

Relative Scale 1"=2'  
Absolute Scale 1:24



**TYPE "P" ASPHALT REPAIR DETAIL**

**B**

Relative Scale 1"=2'  
Absolute Scale 1:24



ISPCW SPECIFICATION REFERENCE	
303.3.3.C	TYPE A-1 COMPACTION
SEC 307	STREET CUTS AND SURFACE REPAIRS
HMA	HOT-MIX ASPHALT
ISPCW	IDAHO STANDARDS FOR PUBLIC WORKS CONSTRUCTION

- GENERAL NOTES**
- A KEEP TRAFFIC OFF CURING CONCRETE 72 HRS UNLESS OTHERWISE APPROVED BY ENGINEER
  - B PORTLAND CEMENT CONCRETE SHALL BE CLASS 3000 PSI EARLY STRENGTH AND COMPLY WITH SECTION 705
  - C ASPHALT RESURFACING REQUIRE PAVING MACHINE OR SPREADER BOX

- SHEET KEYNOTES**
- 1 MIN. 3-IN THICKNESS OF HOT-MIX ASPHALT (HMA) PER SD-801. MATCH CROSS-SLOPE WITH EXISTING PAVEMENT.
  - 2 MIN. 6-IN THICKNESS OF AGGREGATE BASE PER SD-801. STREET CUTS AND SURFACE REPAIRS PER SECTION 307




CITY OF JEROME PUBLIC WORKS  
Richard Wuori, PE, Director  
152 East Avenue A  
Jerome ID 83338  
<http://www.ci.jerome.id.us>

**STREET CUTS AND SURFACE REPAIR DETAILS**

STANDARD DRAWING NO.



**SD-303**

DATE 6 OCT 2017

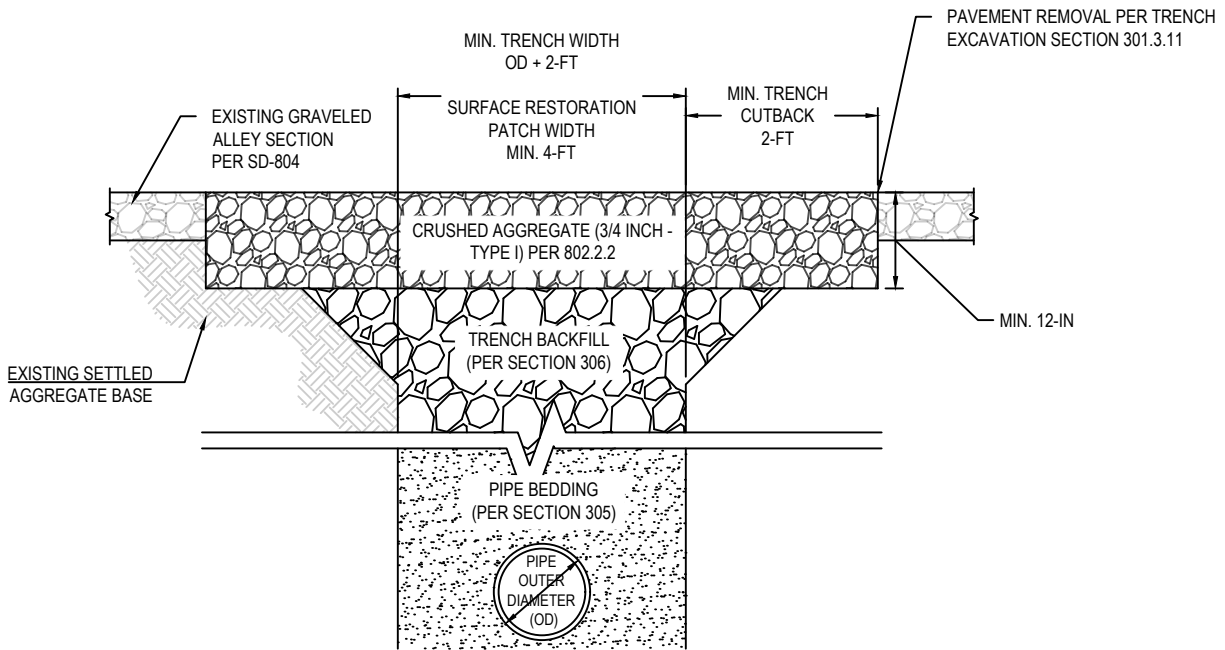


**C** TYPE "C" GRAVEL REPAIR DETAIL

Relative Scale 1"=2'  
 Absolute Scale 1:24

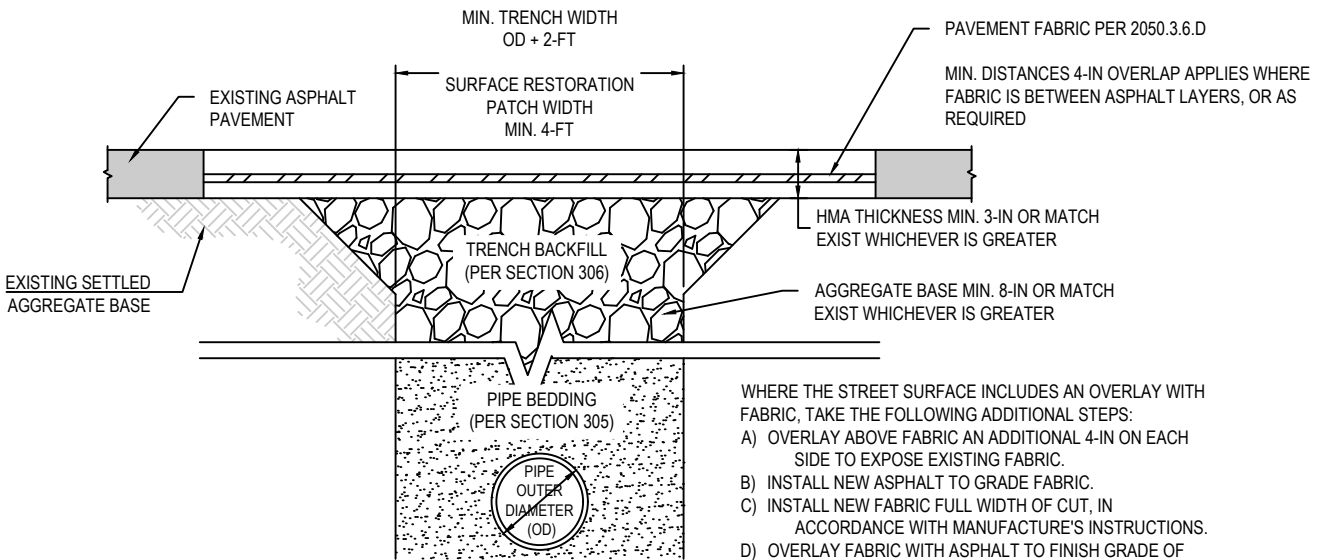

**D** TYPE "P" ASPHALT W/PAVEMENT FABRIC REPAIR DETAIL

Relative Scale 1"=2'  
 Absolute Scale 1:24



WHERE THE STREET SURFACE INCLUDES AN OVERLAY WITH FABRIC, TAKE THE FOLLOWING ADDITIONAL STEPS:  
 A) OVERLAY ABOVE FABRIC AN ADDITIONAL 4-IN ON EACH SIDE TO EXPOSE EXISTING FABRIC.  
 B) INSTALL NEW ASPHALT TO GRADE FABRIC.  
 C) INSTALL NEW FABRIC FULL WIDTH OF CUT, IN ACCORDANCE WITH MANUFACTURE'S INSTRUCTIONS.  
 D) OVERLAY FABRIC WITH ASPHALT TO FINISH GRADE OF STREET.

ISPCW SPECIFICATION REFERENCE	
303.3.3.C	TYPE A-1 COMPACTION
SEC 307	STREET CUTS AND SURFACE REPAIRS
HMA	HOT-MIX ASPHALT
ISPCW	IDAHO STANDARDS FOR PUBLIC WORKS CONSTRUCTION

GENERAL NOTES	
A	KEEP TRAFFIC OFF CURING CONCRETE 72 HRS UNLESS OTHERWISE APPROVED BY ENGINEER
B	PORTLAND CEMENT CONCRETE SHALL BE CLASS 3000 PSI EARLY STRENGTH AND COMPLY WITH SECTION 705
C	ASPHALT RESURFACING REQUIRE PAVING MACHINE OR SPREADER BOX

SHEET KEYNOTES	
1	MIN. 3-IN THICKNESS OF HOT-MIX ASPHALT (HMA) PER SD-801. MATCH CROSS-SLOPE WITH EXISTING PAVEMENT.
2	MIN. 6-IN THICKNESS OF AGGREGATE BASE PER SD-801. STREET CUTS AND SURFACE REPAIRS PER SECTION 307



CITY OF JEROME PUBLIC WORKS  
 Richard Wuori, PE, Director  
 152 East Avenue A  
 Jerome ID 83338  
<http://www.ci.jerome.id.us>

# STREET CUTS AND SURFACE REPAIR DETAILS

STANDARD DRAWING NO.

**SD-303**

DATE 21 SEPT 2017